

Planters

Implements

Disc Blades

Tillage
Tools



9017 GASPCW

**Super Stubble Hinge Wheel
Offset Disk Harrow**



**Working Width
14 to 19 ft.**

**RUGGEDLY BUILT
FOR LONGER LIFE**

The model **9017 GASPCW** is specially designed for primary tillage in fields with high levels of crop residues such as rice straw, sugar cane, sunflower and wheat.

Standard Features:

- TATU Oil Bath Bearings Assemblies with Tapered Roller Blade and Duo-Cone Seals.
- Reinforced frame through two-welded "U" profile.
- Pins thermally hardened.
- Bolt on Heavy Duty Bearing wear plates.
- 2.1/2"(63,50mm) round heat treated alloy steel gang axles.
- Cast disc spacer spools.
- Heat treated boron steel disc blades, notched front and rear.
- Heavy Duty adjustable Bolt on disc blade scrapers.
- Recommended: Two dual 12.5L x 15" - 16 ply rib implement tires (wheels and tires are not included).
- Hydraulic control group includes hydraulic cylinders with double action, hose holders and hoses quick coupler fittings to reach rear of tractor, transport lock.
- Quick adjustable swing tongue
- Adjustable gang axles up to 42 degrees.
- Drawbar jackstand and safety chain.
- Removable bushings on articulated points.
- Leveling disc harrow transport adjustment.
- Gang adjustment without use of tools.
- Tractor needs double command to raise/lower the wheel independtely of the disc harrow swing.

Specifications:

Model	Number of Disc Blades	Working Width ft. in. (mm)	Disc Blades		Weight per Disc lbs (Kg)	Approx. Net Weight* lbs (Kg)	Tractor Draw Bar Horse Power
			Dimensions	Spacing			
9017 GASPCW	23	14' 1" (4,610)	34"x9.0mm	17.5/16"	569 (258)	13,978 (6,340)	175 - 265
	25	16' 7" (5,050)	to	(440mm)	617 (280)	15,200 (6,895)	195 - 295
	29	19' 5" (5,930)	36"x12.0mm		716 (325)	17,635 (8,000)	205 - 310


* Approx. net weight with 34" x 12.0mm disc blades. Depth of Cut: up to 280mm.

> Please note that the tractor draw bar horse power are suggested ranges and vary according to soil conditions and weight added to harrow.

RUGGEDLY BUILT FOR LONGER LIFE



SPECIAL **OIL BATH**
BEARING ASSEMBLIES

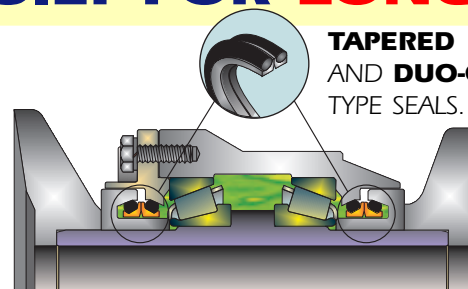

TAPERED BEARINGS
AND **DUO-CONE**
TYPE SEALS.

THE LIFE OF YOUR
DISK HARROW.
REQUIRES ORIGINAL TATU
REPLACEMENT PARTS.



Planters

Implements

Disc Blades

Tillage
Tools



MARCHESAN

MARCHESAN - TATU PRODUCTS

Av. Marchesan, 1979 - P.O. Box 131 - ZIP 15994-900 - Matão-SP-Brazil

Fone: (55) 16 3382-8282 - Fax: (55) 16 3382-1003 / 3382-3607

www.marchesan.com.br

e.mail: tatu@marchesan.com.br

MARCHESAN S.A. reserves the right to improve or modify its products, changing the specifications, without previous notice. - 12/2005 - Edition 03